

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

Removal/Installation of Major Assemblies - Merit Boardwalk

Bill Acceptor Removal

1. Turn off and unplug the game.
2. Unlock and open the coin/bill acceptor door.
3. Pull out the bill acceptor magazine.
4. Remove the 4 hexnuts and screws securing the bill acceptor to the cash door, as well as the ground wire secured by one of the hexnuts. See Figure 1.
5. Remove the hexnut securing the bill acceptor ground wire. See Figure 1.
5. Remove the bill acceptor from its housing.
6. Remove the 2 wire connections from the bill acceptor. See Figure 1.

Bill Acceptor Installation

1. Reconnect the 2 wire harnesses at the top and the bottom of the bill acceptor, with a gap left in between. The 10-pin connector should be plugged in above the 12-pin connector when the bill acceptor is installed in the coin/bill acceptor door. See Figure 1. **NOTE: Failure to install the connectors properly will result in game malfunction.**
2. Fit the bill acceptor into place on the cash door and secure it with the 4 existing screws and nuts. One hexnut will also be used to secure the ground wire originating from the back of the game. See Figure 1.
3. Use the remaining hexnut to secure the bill acceptor ground wire. See Figure 1.
4. Reinstall the bill acceptor magazine.
5. Close and lock the coin/bill acceptor door.
6. Plug in and turn on the game.

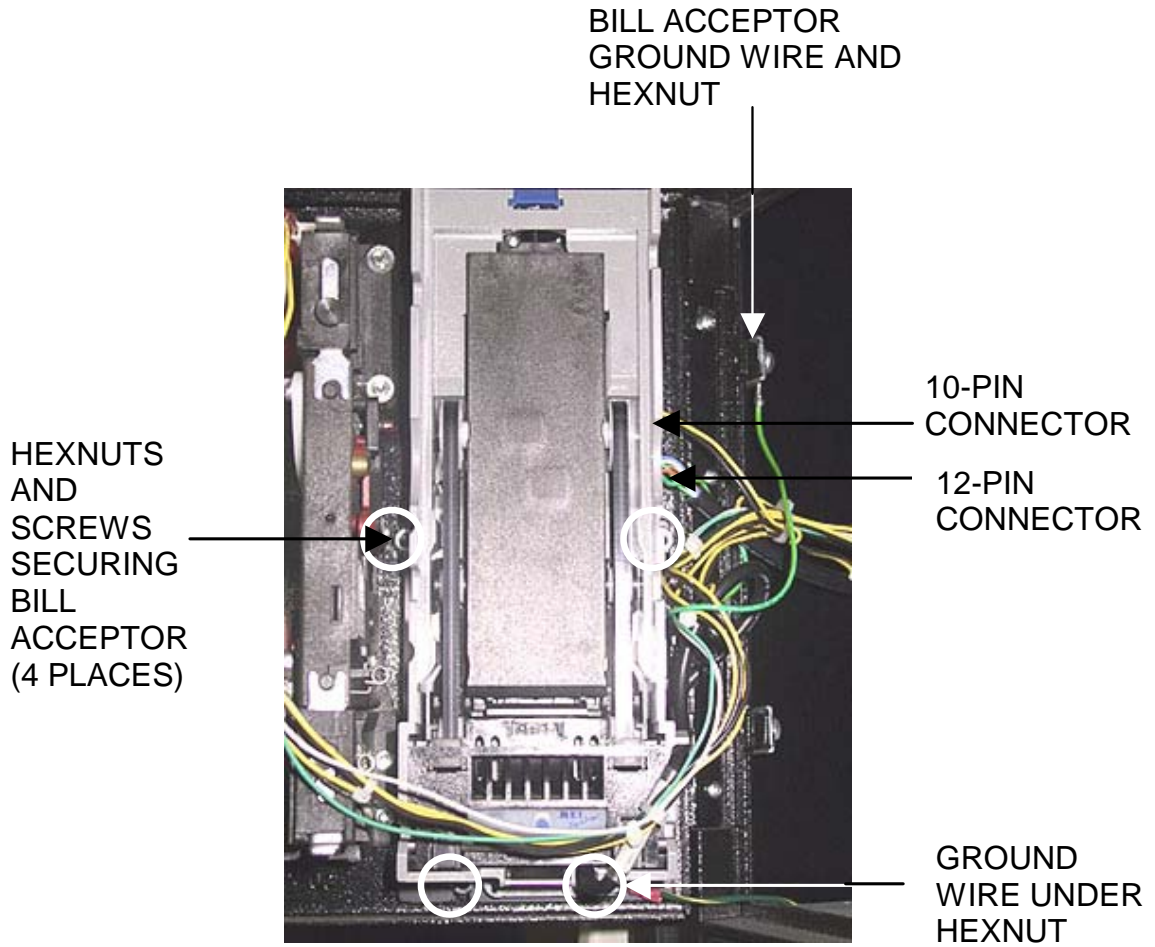


FIGURE 1 - BILL ACCEPTOR WITH MAGAZINE REMOVED