

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

**Removal/Installation of Motherboard -
EZ MAXX/MAXX Elite**

Motherboard Removal

1. Turn off and unplug the game.
2. Unlock and open the rear door.
3. Use the *Motherboard Diagrams* section to determine the board type in your game, then disconnect all connections to the board. NOTE: Be sure to read the Motherboard Handling Precautions before handling the board.
4. Remove the 2 screws securing the motherboard assembly to the shelf and the 2 screws holding the 2 standoffs mounted to the shelf. After removing the standoffs, remove the board and insert it into an anti-static bag for storage.

Motherboard Installation

1. Place the new motherboard in the game and mount the 2 standoffs to the shelf. Also secure the motherboard to the shelf with the 2 screws.
2. Reconnect all connections to the motherboard.
3. Close and lock the rear door.
4. Plug in and turn on the game.

Motherboard Diagrams

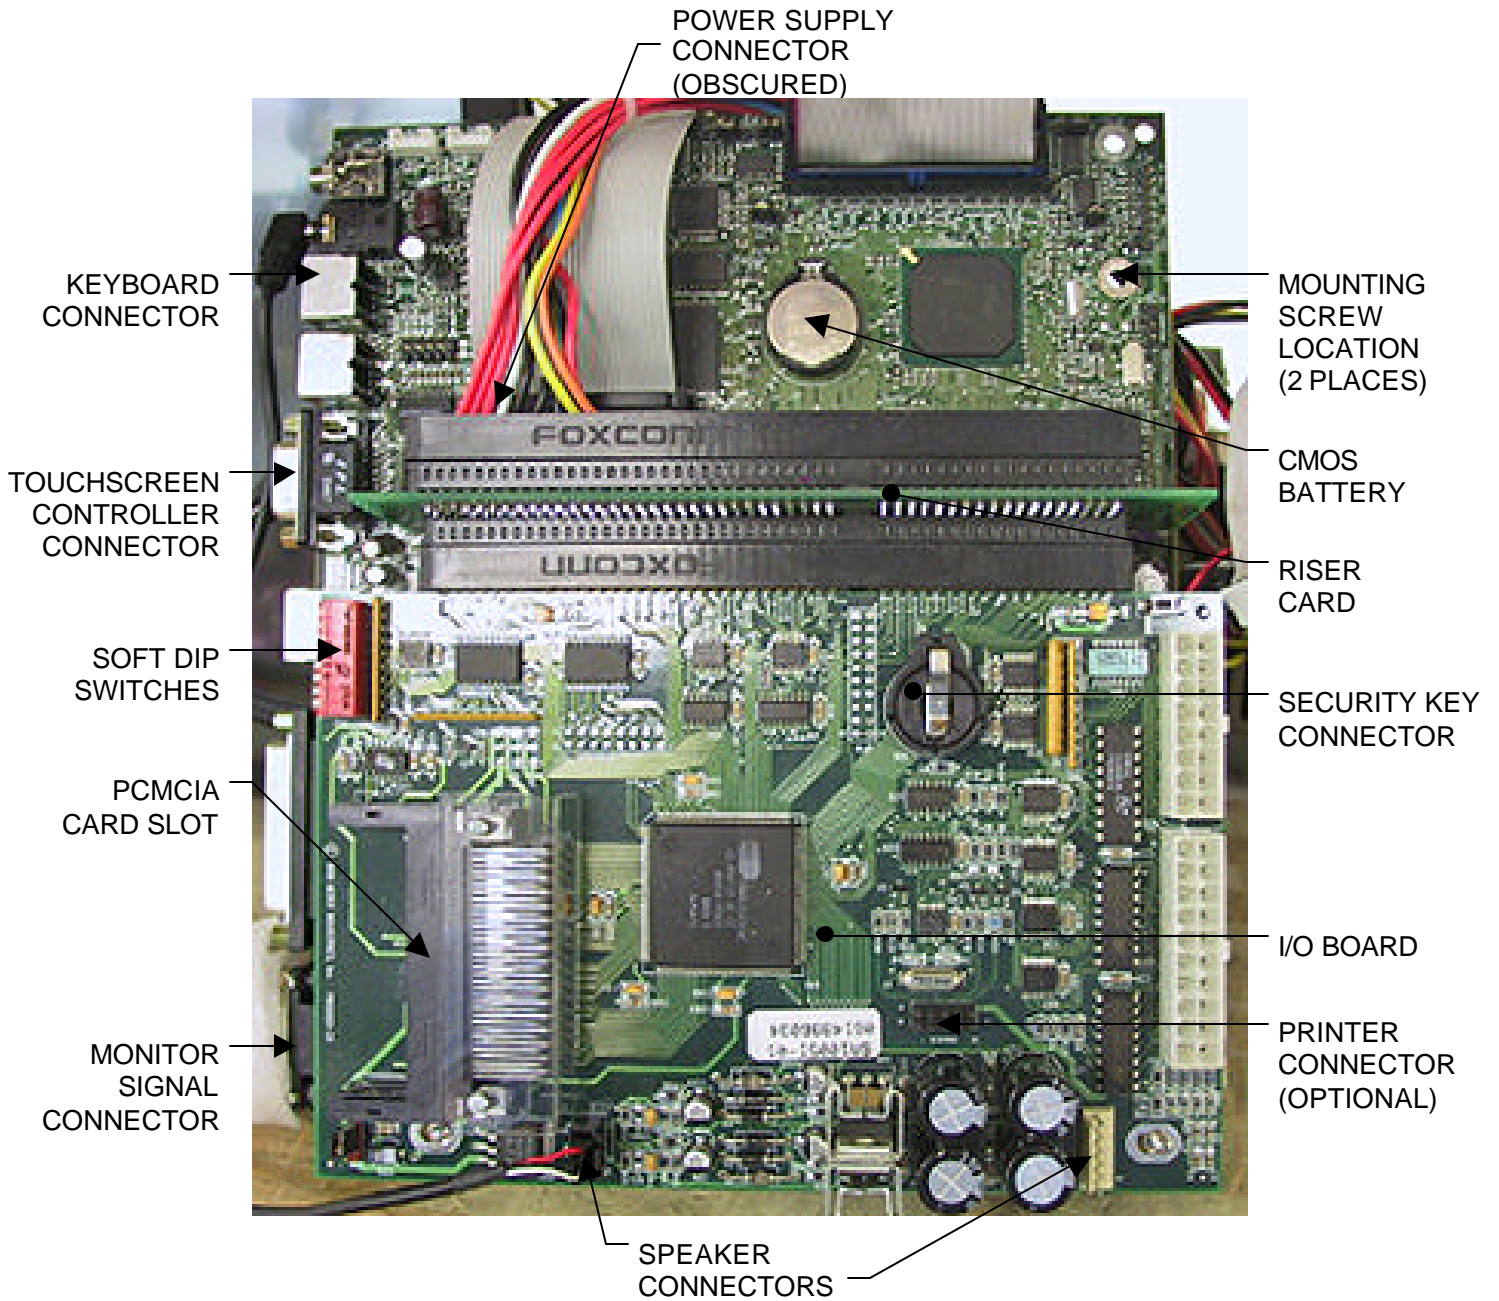


FIGURE 1 - ITOX/MITSUBISHI MOTHERBOARD

Motherboard Diagrams

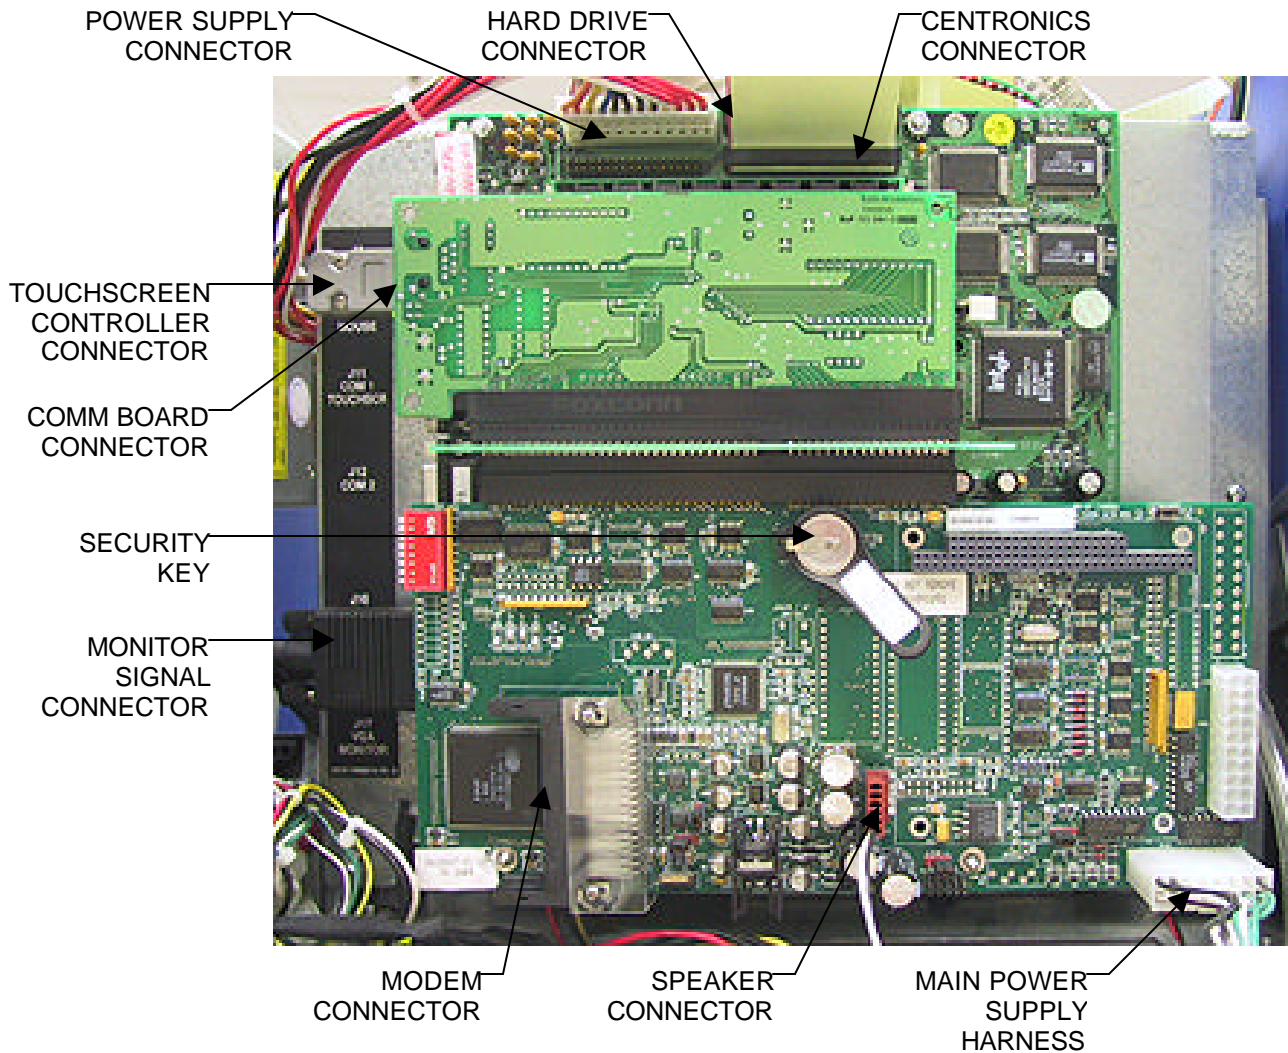


FIGURE 2 - TELCO MOTHERBOARD

Motherboard Diagrams

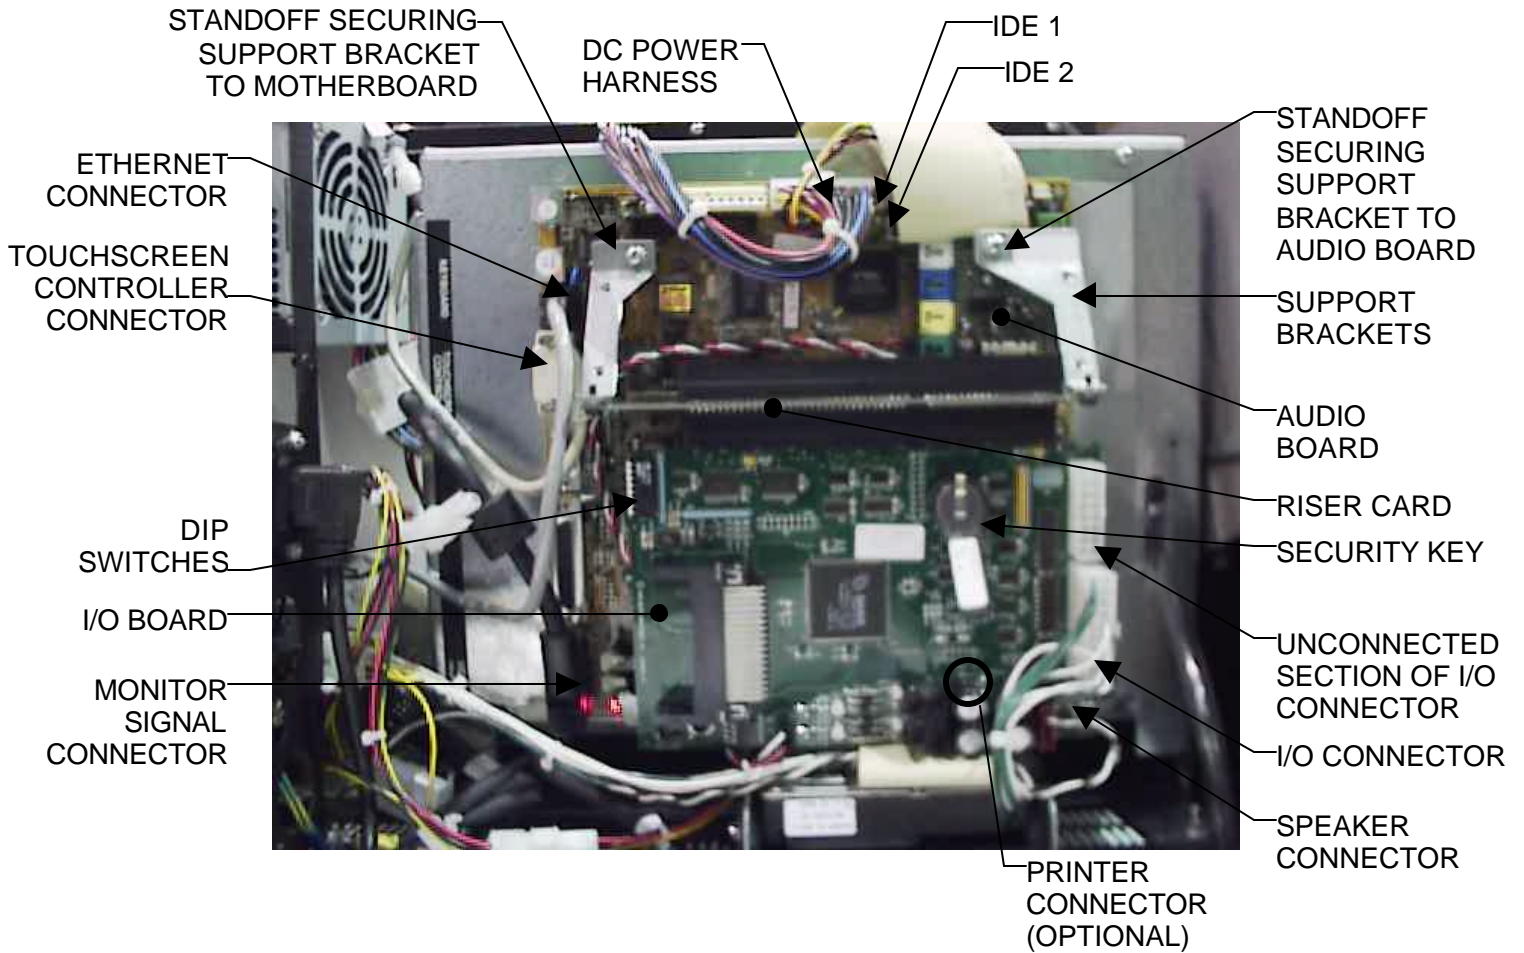


FIGURE 3 - UNICORN MOTHERBOARD