

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

Removal/Installation of Motherboard - FORCE Classic Countertop

Motherboard Removal

1. Turn off the game and unplug the game.
2. Unlock and open the lid.
3. Disconnect all connections to the motherboard, including the ground wire attached to the motherboard mounting frame.
4. Remove the 4 screws mounting the motherboard to the mounting frame (see Figure 1) and carefully remove the board. Insert the board into an anti-static bag for storage. NOTE: Be sure to read the Motherboard Handling Precautions before handling the board.

Motherboard Installation

1. Place the new motherboard on the mounting frame, lining up the screw holes on the board with the holes in the game, then replace the 4 screws.
2. Reconnect all connections to the motherboard, including the ground wire attached to the motherboard mounting frame.
3. Close and lock the lid.
4. Plug in and turn on the game.

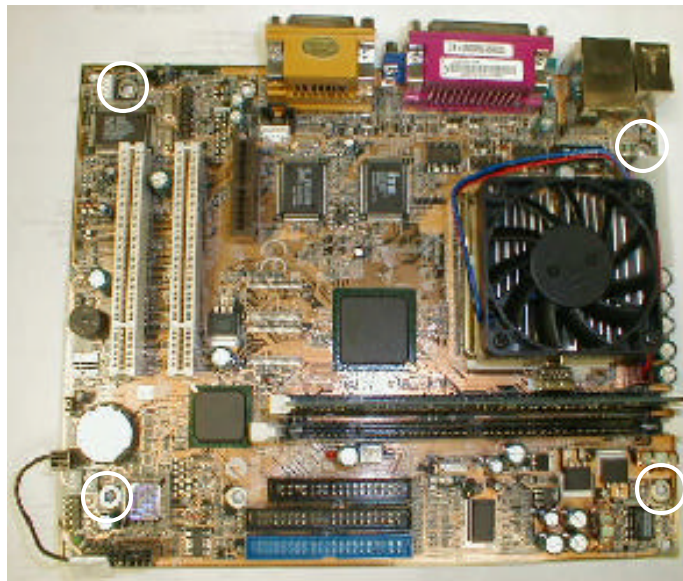


FIGURE 1 – MOTHERBOARD REMOVAL –
LOCATION OF SCREWS SECURING MOTHERBOARD TO MOUNTING FRAME

Troubleshooting Information - Removal/Installation of Motherboard - FORCE Classic Countertop

Megatouch FORCE Technical Reference Manual