

## **ATTENTION:**

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

### **Removal/Installation of Major Assemblies - Fusion Ion**

#### **Bill Acceptor Removal**

1. Turn off and unplug the game.
2. Unlock and open the cash door.
3. Pull out the bill acceptor magazine.
4. Remove the 4 nuts securing the bill acceptor to the cash door. Also remove the ground wire. See Figure 1.
5. Remove the bill acceptor from its housing.
6. Remove the 2 wire connections from the bill acceptor. See Figure 1.

#### **Bill Acceptor Installation**

1. Reconnect the 2 wire harnesses at the top and the bottom of the bill acceptor, with a gap left in between. The 10-pin connector should be plugged in above the 12-pin connector when the bill acceptor is upright and the cash door is closed. **NOTE: When the cash door is open, the 12-pin connector will appear above the 10-pin connector. See Figure 1. Failure to install the connectors properly will result in game malfunction.**
2. Fit the bill acceptor into place on the cash door and secure it with the 4 existing nuts. See Figure 1.
3. Reattach the ground wire. See Figure 1.
4. Reinstall the bill acceptor magazine.
5. Close and lock the cash door.
6. Plug in and turn on the game.

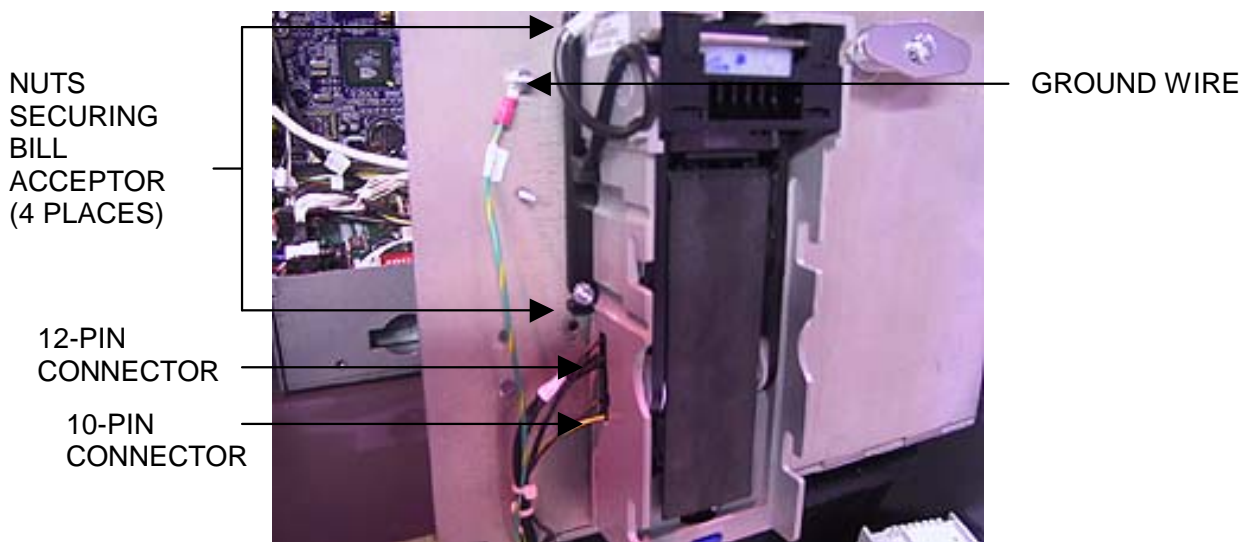


FIGURE 1 - OPEN CASH DOOR AND BILLACCEPTOR

### **Troubleshooting Information - Removal/Installation of Major Assemblies - Fusion Ion**