

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

Removal/Installation of Hard Drive - Blue MAXX/MAXX Classic Countertop

Hard Drive Removal

1. Turn off and unplug the game.
2. Unlock and open the lid.
3. Remove the screw securing the hard drive mounting plate to the game chassis.
NOTE: If your game was converted with an XL to MAXX Kit, the hard drive mounting plate will be fastened with 2 hexnuts on either side of the edge of the mounting plate.
4. Remove the 4 screws and shoulder washers fastening the hard drive to the mounting plate and remove the hard drive. See Figure 1.
5. Disconnect the 4-PIN power connector and hard drive ribbon cable from the hard drive, then remove the hard drive from the game.

Hard Drive Installation

1. Connect the power connector and ribbon cable to the new hard drive.
2. Fasten the hard drive to the mounting plate with the 4 screws and shoulder washers. See Figure 1.
3. Replace the hard drive and mounting plate in the game and secure it with the existing hardware.
4. Close and lock the lid.
5. Plug in and turn on the game.

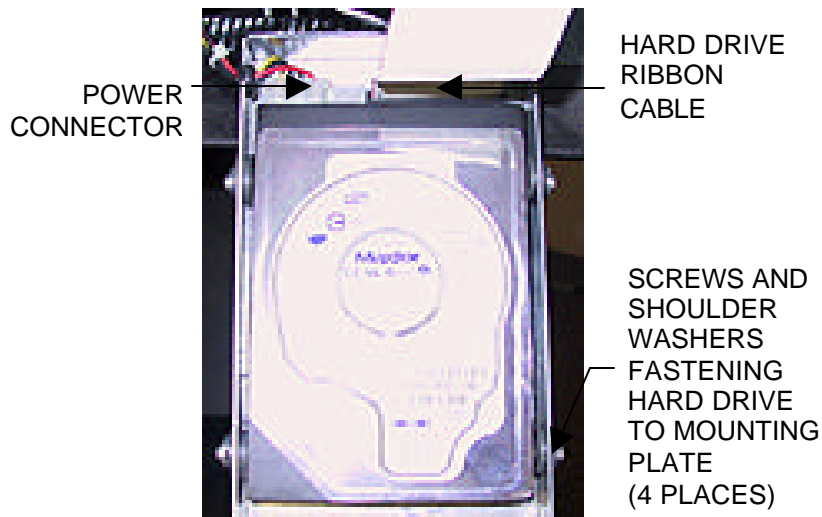


FIGURE 1 - BLUE MAXX/MAXX CLASSIC - CLOSEUP OF HARD DRIVE