

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

Removal/Installation of Major Assemblies - Megatouch Money Shoot

Motherboard Removal

1. Turn off and unplug the game.
2. Unlock and open the bottom door.
3. Remove the 4 screws securing the electronics box cover. Carefully remove the cover (see Figure 1).
4. Disconnect all connections to the motherboard, as well as any other harnesses that may interfere with removal of the board.
5. Remove the 6 screws (3 top and 3 bottom) fastening the edge of the motherboard to the inside of the electronics box (see Figure 2), then carefully lift the motherboard out of the game and insert the board into an anti-static bag for storage. **NOTE: Be sure to read the Motherboard Handling Precautions before handling the board.**

Motherboard Installation

1. Place the new motherboard in the electronics box and refasten the 6 screws (3 top and 3 bottom) securing it to the inside of the box. See Figure 2.
2. Reconnect all connections to the motherboard, as well as any harnesses that were disconnected earlier.
3. Replace the electronics box cover and fasten it with the 4 screws. See Figure 1.
4. Close and lock the bottom door.
5. Plug in and turn on the game.

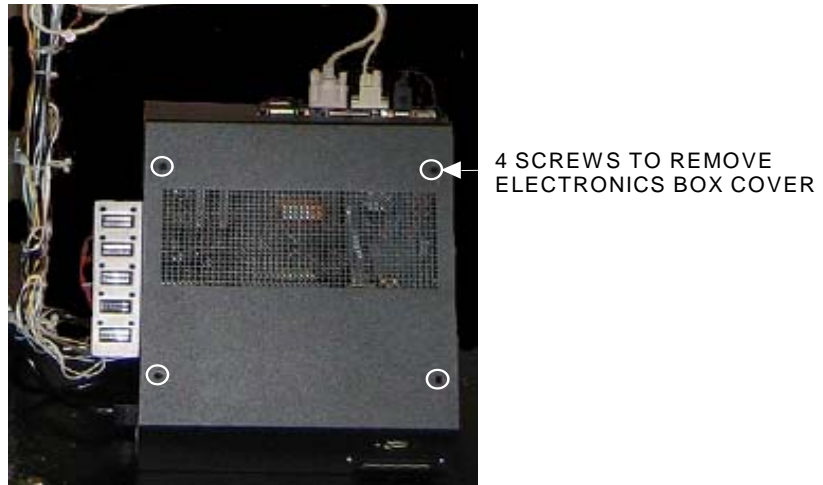


FIGURE 1 - CLOSED ELECTRONICS BOX - LOCATED IN BOTTOM OF MONEY SHOOT CABINET

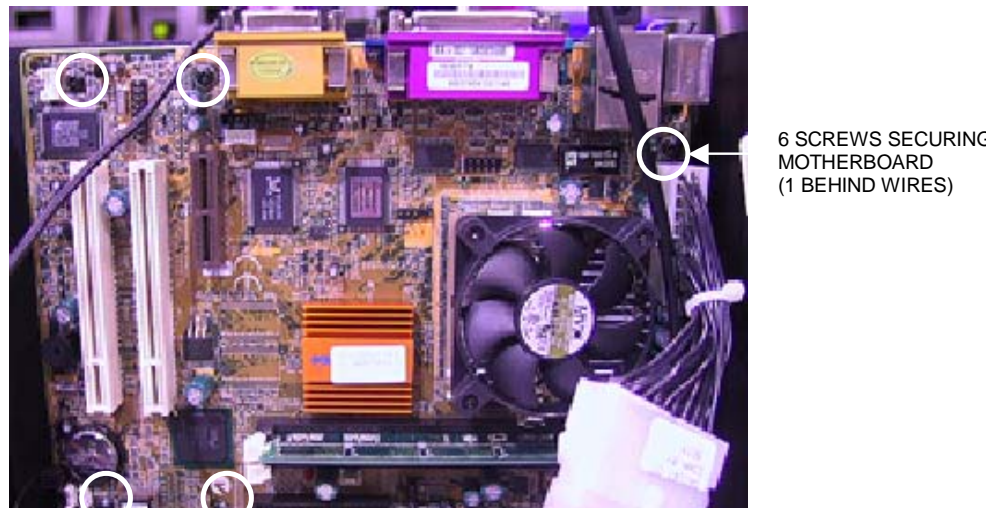


FIGURE 2 - MOTHERBOARD