

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

Removal/Installation of Hard Drive - Mr. VIPS

Hard Drive Removal

1. Turn off and unplug the game.
2. Unlock and remove the lower rear door.
3. Remove the nuts fastening the electronics tray to the game. The side wall mounted tray will have 4 nuts (see Figure 1). The bottom mounted tray will have 3 nuts, 2 in the right front corner and 1 on the left side by the power strip (see Figure 2).
4. Disconnect any connections or cables preventing the electronics tray from being removed from the game, then remove the tray. Be sure to keep track of what was disconnected.
5. Remove the 4 screws and shoulder washers fastening the hard drive to the mounting plate on the electronics tray, then slide out the hard drive from under the I/O board until you're able to disconnect the power connector and ribbon cable from the drive. See Figure 3.

Hard Drive Installation

1. Place the new hard drive under the I/O board and connect the power connector and ribbon cable to the drive, then fasten the drive to the mounting plate with the 4 screws and shoulder washers (see Figure 3)
2. Replace the electronics tray in the game and fasten it with the same nuts removed in step 3 (see Figure 1 or Figure 2).
3. Reconnect any connections from step 4 above.
4. Replace and lock the rear door.
5. Plug in and turn on the game.



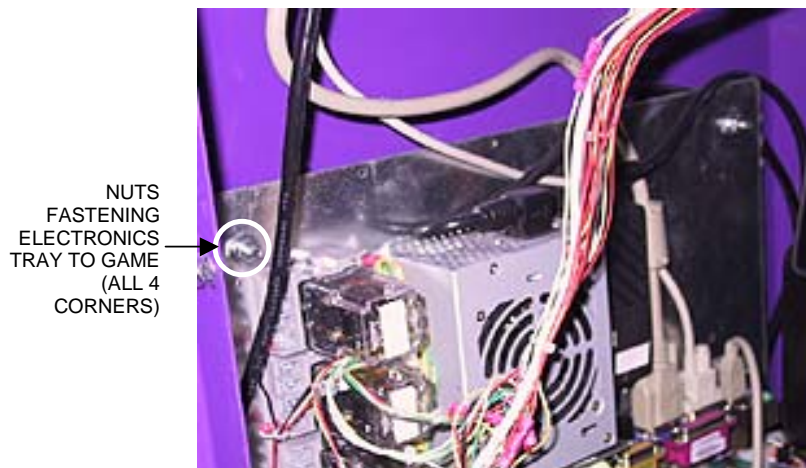


FIGURE 1 - CPU SECTION - ELECTRONICS TRAY MOUNTED ON SIDE WALL

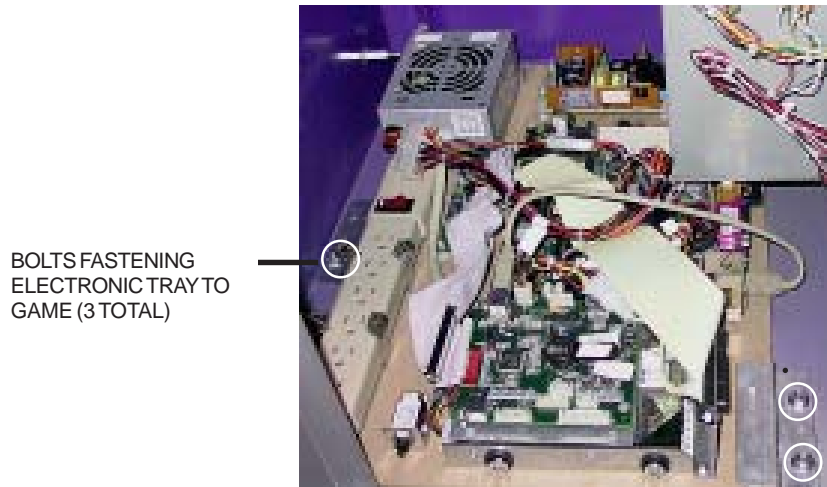

BOLTS FASTENING
ELECTRONIC TRAY TO
GAME (3 TOTAL)

FIGURE 2 - CPU SECTION - ELECTRONICS TRAY MOUNTED ON BOTTOM WALL

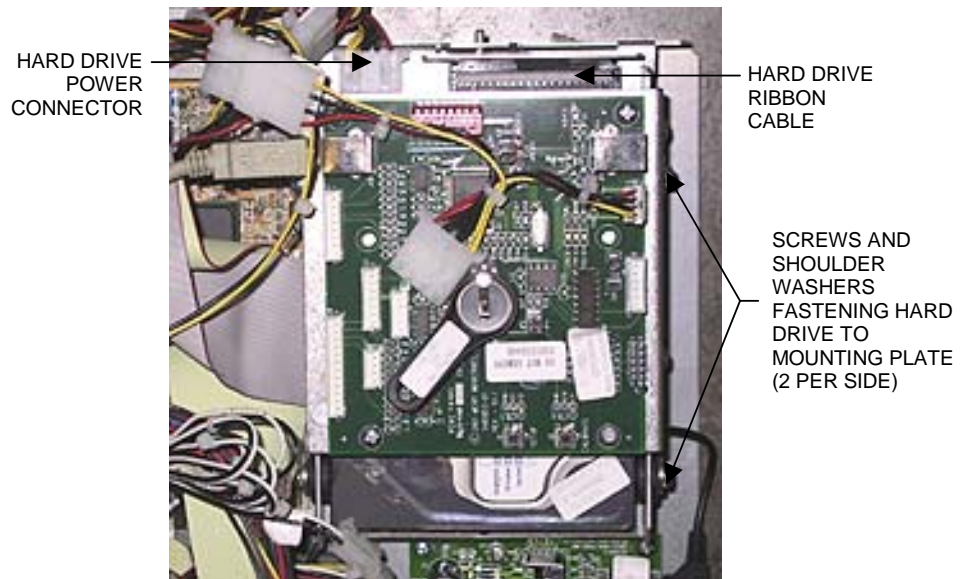

HARD DRIVE
POWER
CONNECTOR

HARD DRIVE
RIBBON
CABLE

SCREWS AND
SHOULDER
WASHERS
FASTENING HARD
DRIVE TO
MOUNTING PLATE
(2 PER SIDE)

FIGURE 3 - CLOSEUP OF HARD DRIVE