

## **ATTENTION:**

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

### **Removal/Installation of Motherboard - Mr. VIPS**

#### **Motherboard Removal**

1. Turn off and unplug the game.
2. Unlock and remove the rear door.
3. Remove the nuts fastening the electronics tray to the game. The side wall mounted tray will have 4 nuts (see Figure 1). The bottom mounted tray will have 3 nuts, 2 in the right front corner and 1 on the left side by the power strip (see Figure 2).
4. Disconnect any connections or cables preventing the electronics tray from being removed from the game, then remove the tray. Be sure to keep track of what was disconnected.
5. Disconnect all connections to the motherboard. Be sure to keep track of what was disconnected.
6. Side wall mounted tray: Remove the 4 screws mounting the motherboard to the electronics tray. Bottom mounted tray: Release the locking head of the nylon standoffs by pushing in the sides (see Figure 3 for both locations). Carefully remove the board and insert into an anti-static bag for storage. NOTE: Be sure to read the Motherboard Handling Precautions before handling the board.

#### **Motherboard Installation**

1. Place the new motherboard on the electronics tray and secure it with the 4 screws or nylon standoffs (see Figure 3).
2. Reconnect all connections to the motherboard.
3. Replace the electronics tray in the game and fasten it with the nuts. See Figure 1 or Figure 2.
4. Reconnect any connections from step 4 above.
5. Replace and lock the rear door.
6. Plug in and turn on the game.

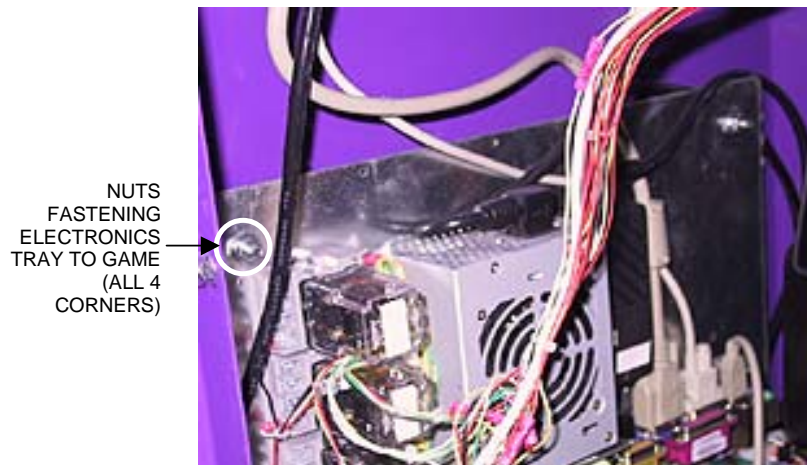


FIGURE 1 - CPU SECTION - ELECTRONICS TRAY MOUNTED ON SIDE WALL

BOLTS FASTENING  
ELECTRONICS TRAY  
TO GAME (3 TOTAL)



FIGURE 2 - CPU SECTION - ELECTRONICS TRAY MOUNTED ON BOTTOM WALL

SCREWS  
FASTENING  
MOTHERBOARD TO  
ELECTRONICS  
TRAY (2 PER SIDE)

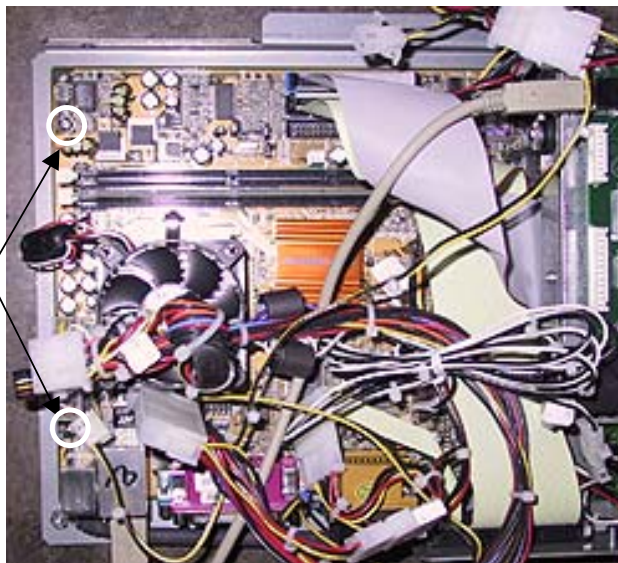


FIGURE 3 - CLOSEUP OF MOTHERBOARD